

# P13061, P13076

Industrial Flatwork Ironers





## Architectural/Mechanical Product Specifications

888.560.4925 fax 920.231.4220 2500 State Rd 44

www.onepressironer.com

Oshkosh, WI 54904

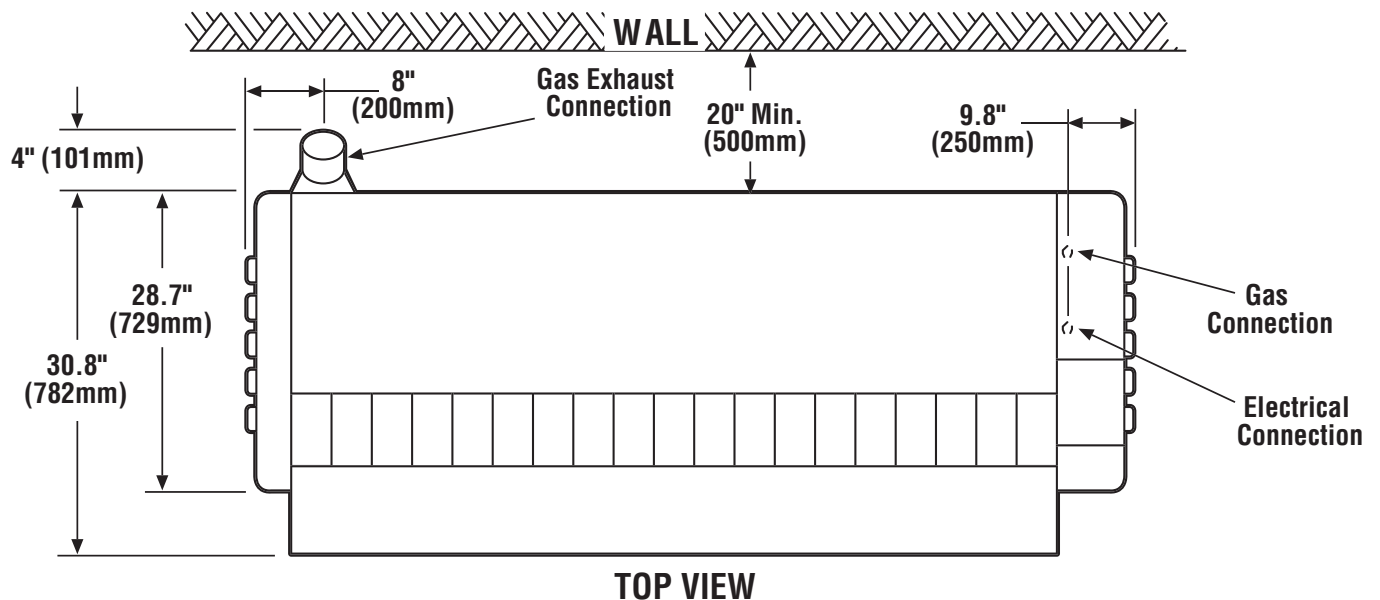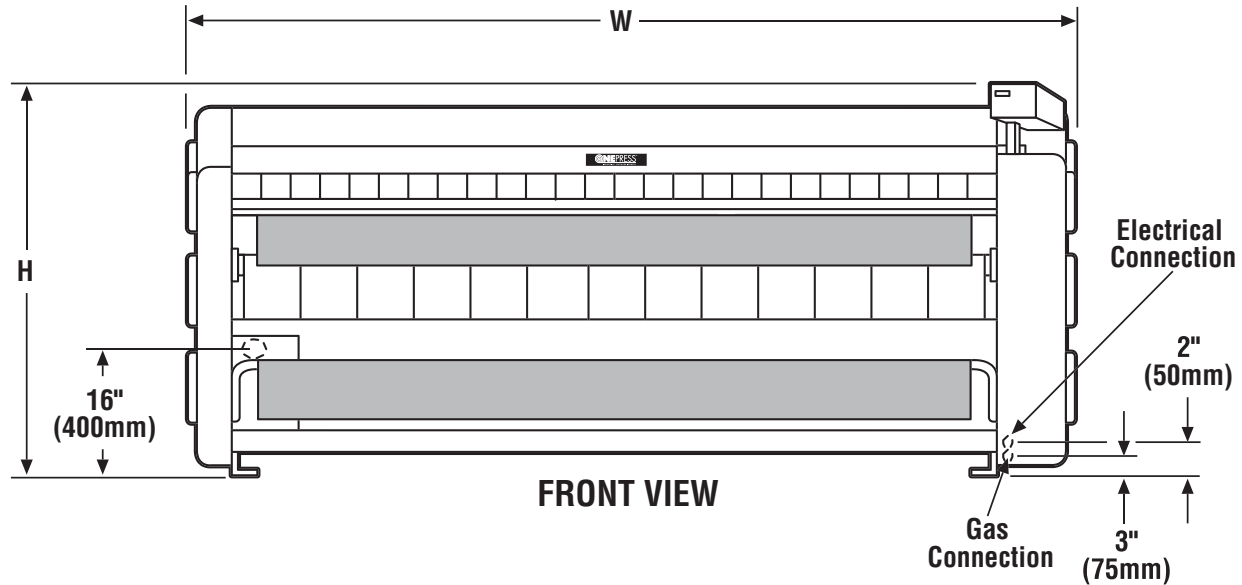

\*Specifications subject to change without notice.

## P13061, P13076 Product Technical Specifications

|                        | P13061                            | P13076                            |
|------------------------|-----------------------------------|-----------------------------------|
| Cylinder Diameter      | 12.8 in. (325 mm.)                | 12.8 in. (325 mm.)                |
| Usable Cylinder Length | 61 in. (1550 mm.)                 | 76.4 in. (1940 mm.)               |
| Finishing Speed        | 3-16 ft./min. (1-5 m./min.)       | 3-16 ft./min. (1-5 m./min.)       |
| Shipping Weight        | 1,333 lbs. (605 kg.)              | 1,522 lbs. (690 kg.)              |
| Net Weight             | 992 lbs. (450 kg.)                | 1,135 lbs. (515 kg.)              |
| Height (H)             | 51.9 in. (1319 mm.)               | 51.9 in. (1319 mm.)               |
| Width (W)              | 81.4 in. (2068 mm.)               | 96.7 in. (2456 mm.)               |
| Depth (D)              | 34.8 in. (885 mm.)                | 34.8 in. (885 mm.)                |
| Minimum Clearances:    |                                   |                                   |
| Rear                   | 20 in. (50 cm.)                   | 20 in. (50 cm.)                   |
| Sides                  | 20 in. (50 cm.)                   | 20 in. (50 cm.)                   |
| Front                  | 48 in. (122 cm.)                  | 48 in. (122 cm.)                  |
| Exhaust Diameter (EV)  | 4.5 in. (114 mm.)                 | 4.5 in. (114 mm.)                 |
| Exhaust Air Flow       | 347 cfm (590 m. <sup>3</sup> /h.) | 347 cfm (590 m. <sup>3</sup> /h.) |
| Motor Power            | .67 Hp (0.67 CV)                  | .67 Hp (0.67 CV)                  |
| Circuit Protection:    |                                   |                                   |
| Electric 208-240/60/3  | 50 Amps                           | 63 Amps                           |
| Gas 208-240/60/1       | 16 Amps                           | 16 Amps                           |
| Full Load              | 3.5 Amps                          | 3.5 Amps                          |
| Electric Heating (E)   | 15.6 Kw                           | 19.6 Kw                           |
| Gas Heating            | 75,600 BTU/h. (24,000 Kcal./h.)   | 95,500 BTU/h. (24,090 Kcal./h.)   |
| Gas Inlet Diameter (G) | .5 in. (12.7 mm.)                 | .5 in. (12.7 mm.)                 |
| Gas Supply:            |                                   |                                   |
| Natural                | 7 (±1) in.                        | 7 (±1) in.                        |
| Propane                | 11 (±3) in.                       | 11 (±3) in.                       |

\*International Voltages Available

Specifications subject to change without notice.

